

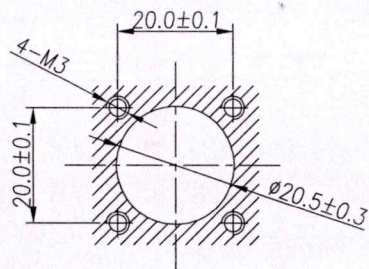



THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.


Customer Drawing

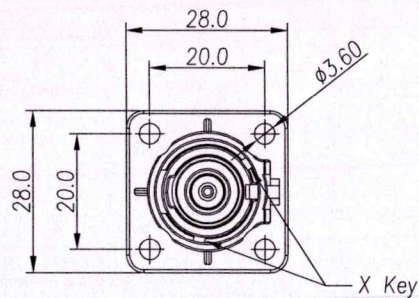

面板安装孔尺寸
Panel Size




REV		ZONE	ECO	REVISIONS			
				DESCRIPTION	DATE	BY	APPR
A	--	--	--	Change Dust Cap	03/31/16	RW	TS
B	--	--	--	Update Spec.	12/02/19	Fred	JL

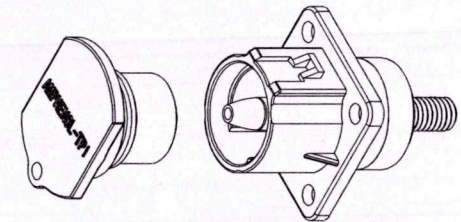

Standard Part List

P/N	Model NO.	Polarization	Part Name
AC-HA000563	PL00X-120-20M6	X	PowerLok Rcpt PL00X-120-20M6
AC-HA000564	PL00Y-120-20M6	Y	PowerLok Rcpt PL00Y-120-20M6
AC-HA000565	PL00U-120-20M6	U	PowerLok Rcpt PL00U-120-20M6
AC-HA000566	PL00V-120-20M6	V	PowerLok Rcpt PL00V-120-20M6
AC-HA000567	PL00W-120-20M6	W	PowerLok Rcpt PL00W-120-20M6

The Key of Angle

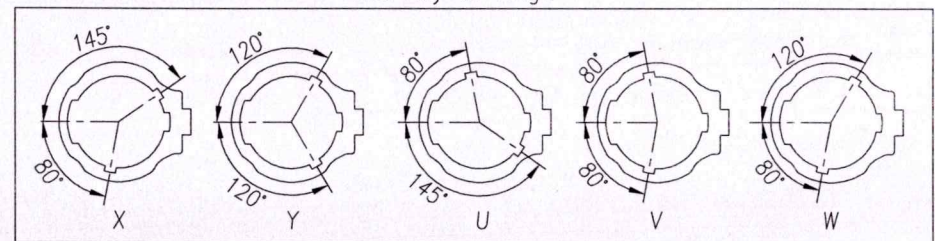

Amphenol TPI
2019-12-09
REGISTERED COPY

订购信息 Ordering Information

PL00 X - 120 - 20 M6

键位及颜色 Key & Color

"X", 橙色 Orange
"Y", 黑色 Black
"U", 黄色 Yellow
"V", 绿色 Green
"W", 红色 Red

螺纹 Thread
M6




规格参数 (Spec.):

1. 工作温度 Operating temperature: -40° C~+125° C.
2. 额定电流 Current rating: 120 A.
3. 额定电压 Operating voltage: 1000 VDC.
4. 耐电压 Dielectric withstanding voltage: 5000 VDC.
5. 防护等级 Protection class: IP67.
6. 电磁屏蔽 Shielding.
7. 机械寿命 Mating cycle: 100 Min.
8. 带自动二次锁扣 Automatic secondary lock.


AMPHENOL TPI		Amphenol Technical Products International GZ					
第三角投影 THIRD ANGLE PROJECTION		页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	PART NAME: PwrLok 5.7mm IPOS Rcpt ScrewM6	
		1 of 1	A3	B		DWG NO: PL00-120-20-M6	
签名 SIGNATURE Fred		日期 DATE 12/02/19		UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 0 PL DEC ±1.50 1 PL DEC ±0.50 2 PL DEC ±0.20 Angles ±1°			
制图 DRAWN		审核 CHECKED		批准 APPROVAL		CUST PART #: N/A	
2019.12.2		2019.12.2		2019.12.2		CUST REV. -	

THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

Customer Drawing

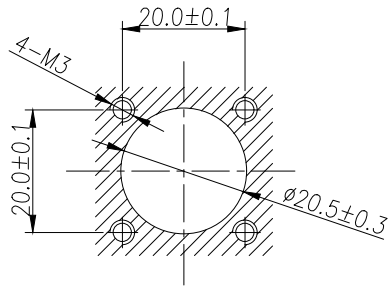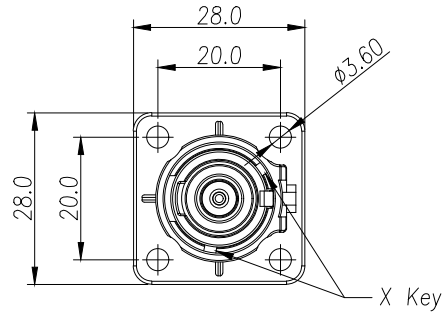

面板安装孔尺寸
Panel Size



订购信息 Ordering Information

PL00 X - 120 - 20 M6

键位及颜色 Key & Color

螺纹 Thread


"X", 橙色 Orange
"Y", 黑色 Black
"U", 黄色 Yellow
"V", 绿色 Green
"W", 红色 Red

M6

规格参数(Spec.):

1. 工作温度 Operating temperature: -40° C~+125° C.
2. 额定电流 Current rating: 120 A.
3. 额定电压 Operating voltage: 1000 VDC.
4. 耐电压 Dielectric withstanding voltage: 5000 VDC.
5. 防护等级 Protection class: IP67.
6. 电磁屏蔽 Shielding.
7. 机械寿命 Mating cycle: 100 Min. $\triangle B$
8. 带自动二次锁扣 Automatic secondary lock.


6		7		8	
REV		ZONE		ECO	
DESCRIPTION		DATE		BY	
A		--		--	
B		--		--	

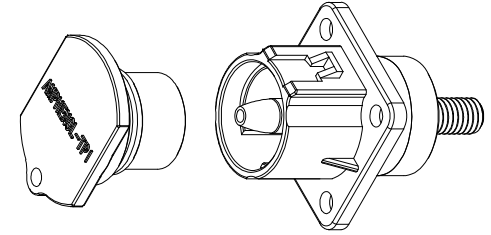

Standard Part List

P/N	Model NO.	Polarization	Part Name
AC-HA000563	PL00X-120-20M6	X	PowerLok Rcpt PL00X-120-20M6
AC-HA000564	PL00Y-120-20M6	Y	PowerLok Rcpt PL00Y-120-20M6
AC-HA000565	PL00U-120-20M6	U	PowerLok Rcpt PL00U-120-20M6
AC-HA000566	PL00V-120-20M6	V	PowerLok Rcpt PL00V-120-20M6
AC-HA000567	PL00W-120-20M6	W	PowerLok Rcpt PL00W-120-20M6

The Key of Angle

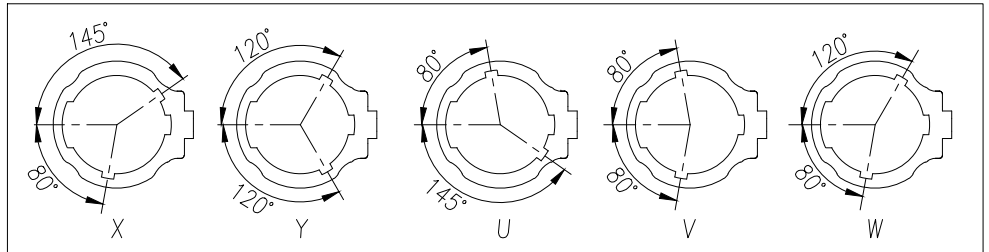

AMPHENOL



Amphenol Technical Products International GZ

第三角投影 THIRD ANGLE PROJECTION		页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE	PART NAME:	
1 OF 1		A3	B			PwrLok 5.7mm 1POS Rcpt ScrewM6	
签名 SIGNATURE		日期 DATE		UNLESS OTHERWISE SPECIFIED		DWG NO:	
制图 DRAWN		Fred		1) All dimensions are in metric(mm).		PL00-120-20-M6	
审核 CHECKED		YM Zeng		2) Tolerances are as follows:		CUST PART #:	
批准 APPROVAL		James Li		0 PL DEC ±1.00 1 PL DEC ±0.50 2 PL DEC ±0.20		N/A	
				Angles ±1°		CUST REV.	
						-	